

## MEDIDOR DE NÍVEL TIPO ULTRA SÔNICO PARA LÍQUIDOS SÉRIE NUS-4

**NUS-4**

- Measuring range:  
Liquids: up to 25 m
- Accuracy:  
 $\pm 0,2$  % of reading  
 $+0,05$  % of full scale
- $p_{\max}$ : 3 bar abs.  
 $t_{\max}$ : 90 °C
- Connection:  
G 1½, G 2, 1½ NPT, 2 NPT  
DIN-flange  
DN 80, DN 125, DN 150  
ANSI-flange 3", 5", 6"
- Housing material:  
Aluminium  
Sensor material: PP
- Output:  
4 ... 20 mA, Relay or  
programming unit with  
LCD display



## Ultrasonic Level Meter Model NUS-4

### Description

The Kobold ultrasonic level meter, model NUS-4, is used for non-contact, continuous level and volume measurement in vessels or for flow measurement in open channels.


Level measurement technology based on the non-contacting ultrasonic principle is especially suited for applications where, for any reason, no physical contact can be established to the surface of the material to be measured.

Such reasons may include corrosive attack by the process medium against the measuring device material (acids), possible contamination (sewage) or particles of the process medium adhering to the measuring device (adhesive materials).

The ultrasonic level metering technology is based on the principle of measuring the time required for the ultrasound pulses to make a round trip from the sensor to the level to be measured and back. The sensor emits an ultrasonic pulse train and receives the echoes reflected. The electronic evaluates the echo time of the pulses and determines the level. The evaluating electronics is mounted compact on the unit.

For remote transmission, a norm signal output and for monitoring purposes, a relay contact is available. For programming and for local display, the units may be delivered with an optional pluggable programming unit with LCD display.

The sensors have a total beam angle of 5°-7° at -3 dB. This ensures a reliable measurement in narrow silos with uneven side walls as well as in process tanks with various protruding objects. Furthermore, as a result of the narrow beam angle the emitted ultrasonic signals have an outstanding focusing - deep penetration through gases, vapour and foam is ensured.

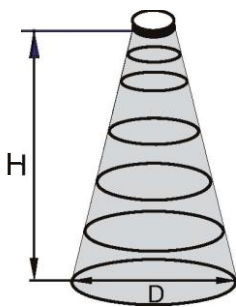

Conical Beam Diameter D (m)

H	NUS-4004	NUS-4006	NUS-4008	NUS-4010	NUS-4015	NUS-4020
1 m	0.15 m	0.14 m	0.18 m	0.16 m	0.21 m	0.27 m
2 m	0.25 m	0.23 m	0.30 m	0.25 m	0.30 m	0.39 m
4 m	0.46 m	0.40 m	0.54 m	0.42 m	0.47 m	0.64 m
6 m	-	0.58 m	0.79 m	0.60 m	0.65 m	0.88 m
8 m	-	-	-	0.77 m	0.82 m	1.13 m
10 m	-	-	-	0.95 m	1.00 m	1.37 m
15 m	-	-	-	-	1.43 m	1.98 m
25 m	-	-	-	-	-	3.21 m

### Technical Details


Measuring principle:	ultrasonic principle, echo time measurement
Frequency:	see order table
Beam cone:	NUS-4004 : 6°, NUS-4006, -4010, -4015 : 5° NUS-4008, NUS-4025 : 7°
Delay time:	10, 30, 60 seconds; programmable
Meas. accuracy (at 20°C):	±0.2 % of reading +0.05 % of full scale
Resolution:	depending on measuring distance <2 m : 1 mm 2 ... 5 m : 2 mm 6 ... 10 m : 5 mm >10 m : 10 mm
Mounting position:	vertical to the product surface
Process temperature:	-30 ... +90 °C
Ambient temperature:	-30 ... +70 °C -25 ... +70 °C (with programming unit)
Operating pressure:	0.5 ... 3 bar abs. (<1 bar abs. on request)

### Materials

Housing:	Aluminium, powder-coated
Sensor and connection:	Polypropylene
Process connection:	
NUS-4004:	G 1½", 1½ NPT
NUS-4006, NUS-4008:	G 2", 2 NPT
NUS-4010:	Flange DN 80, ANSI 3"
NUS-4015:	Flange DN 100, ANSI 5"
NUS-4025:	Flange DN 150, ANSI 6"
	*G-thread with counter nut and EPDM-gasket

Electrical connection:	2 x M 20 x 1,5 cable gland cable diameter 6 ... 12 mm and 2 x ½" NPT  wire cross section: 0.5 ... 1.5 mm <sup>2</sup>
Switching output:	Relay (SPDT) 30V <sub>DC</sub> , 1A
Analogue output:	4 ... 20 mA (3.9 ... 20.5 mA) galvanically isolated, protection against surge transients
Load:	max. (U <sub>s</sub> - 11.4 V) / 0.02 A,
Power supply:	12 - 36 V <sub>DC</sub> , 2-wire (reverse polarity protected)
Display (pluggable):	6-digit LCD-Display, symbols and bar graph, PBT, glass fibre reinforced, flame proof (DuPont®)
Protection:	Sensor IP 68, Housing: IP 67
Weight: with thread:	approx. 1.1 kg with flange: approx. 2.5 kg

### Electrical Connection

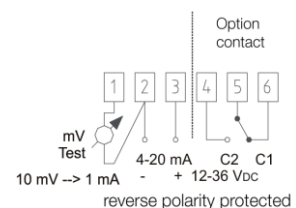

No responsibility taken for errors; subject to change without prior notice.


## Ultrasonic Level Meter Model NUS-4

### Analogue output

The standard version is delivered with 4 -20 mA signal output.

The following can be programmed with keys:

- Assignment of the 4 or 20 mA signals to the required levels
- Error indication by the current output (3.8 mA, 22 mA or hold the last value)
- Damping of analogue output (10, 30, 60 sec.)

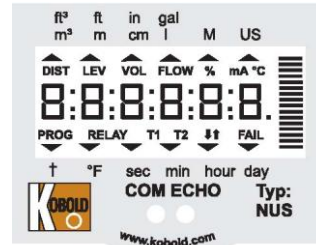

Factory default:

- 4 mA: assigned to the minimum level 0 %
- 20 mA: assigned to the maximum level 100 %
- Error indication by the current output: hold last value
- Damping: 60 sec.

### Relay output:

The units may be optionally delivered with a relay output. Following functions may be programmed with help of programming unit:

- 2-point switching for monitoring of level
- Error signal in case of Echo Loss
- Pulse output for volume counting when used as a flow Meter

When shipped without programming unit, the NUS-4 is delivered in a 2-point switching state (tank empty – relay energised, tank full – relay de-energised).

### Programming unit with LCD-Display:

The pluggable programming unit can be used to display the measured values during measurement and to change the program functions during programming.

2 individual accessible programming modes may be chosen:

- Quickset, for quick programming of important parameters
- Full programming

### Adjustable functions with programming unit

- Engineering units for the display (metric or US)
- Maximum measuring distance
- Value for 4 mA output signal
- Value for 20 mA output signal
- Error type indication of analogue output
- Damping time
- Selection distance measurement, level measurement, volume measurement, weight (when density is known),
- flow measurement in open channels
- Optimisation of measurement
- Linearisation
- Close-end-blocking
- Far-end-blocking
- Direction of level change
- Selection of pre-programmed 11 vessel forms for volume measurement
- Selection of pre-programmed 21 measuring channels for flow measurement in open channels
- Total flow amount resettable
- Total flow amount non-resettable
- Bar graph assigned to analogue output or echo
- Keyword protection
- Simulation mode


Order details (Example: NUS-4004 R8 340)

Model	Sensor Material	Measuring Range	Frequency [kHz]	Connection	Power supply	Output/ Display
NUS-4...	0 = Polypropylene	04 = 0.2 - 4m	80	R8 = 1½ BSP N8 = 1½ NPT	3 = 12-36 V <sub>DC</sub>	40 = 4 - 20 mA R0 = 4 - 20 mA and relay 4P = pluggable programming unit with LCD-Display, 4 - 20 mA RP = pluggable programming unit with LCD-Display, 4 - 20 mA, Relay
		06 = 0.25 - 6m	80	R9 = 2 BSP N9 = 2 NPT		
		08 = 0.35 - 8m	60			
		10 = 0.35 - 10m	60	FB = Flange DN80 AB = ANSI-flange 3"		
		15 = 0.45 - 15m	40	FD = Flange DN 125 AD = ANSI-flange 5"		
		25 = 0.6 - 25m	20	FE = Flansch DN 150 AE = ANSI-flange 6"		
NUS-400P	pluggable programming unit with LCD-Display					


No responsibility taken for errors; subject to change without prior notice.

Dimensions


NUS-4004...

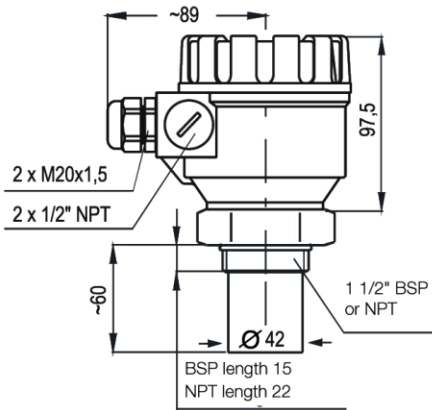


NUS-4006...

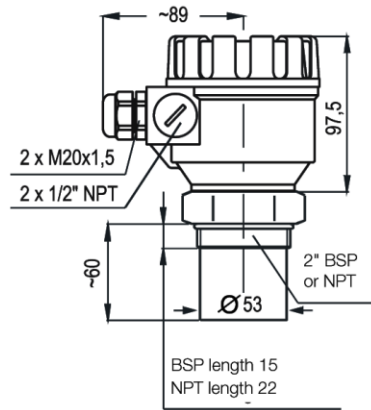


NUS-4008...

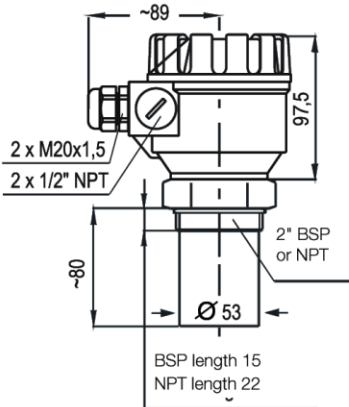

NUS-4010...

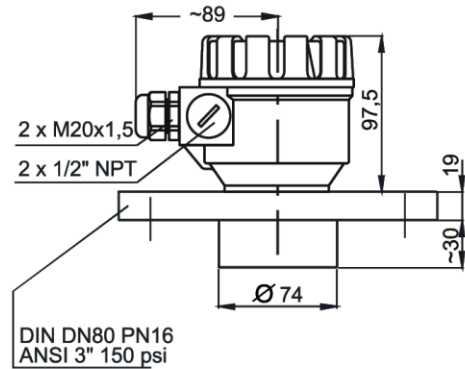

NUS-4015...

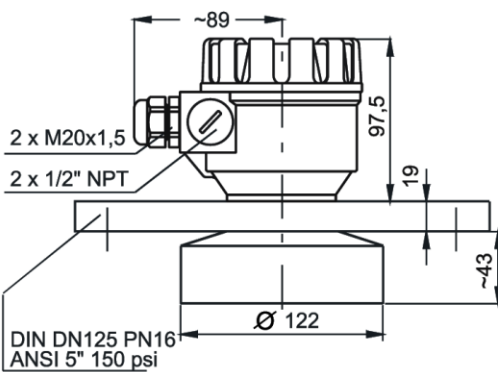

NUS-4025...

